

# SCG Concrete Roof Tiles NeuStile Oriental Series





*Oriental Pearl*



*Oriental Brick*






# PROUD TO BE

## “NeuStile Oriental”

**“NeuStile Oriental Style....reflecting Civilization of the East”**

**NEW SCG Concrete Roof Tiles NeuStile Oriental Series...**uniquely designed with new dimensional linings that enhance the aesthetics of NeuStile Oriental as well as prevent leakages, available in perfectly selected color shades



- New design with perfect dimensional aesthetics and lighter
- Superior leakage protection without using sub-roof
- Excellent strength with "High Pressing Process Technology" production process
- Long lasting color with "Airless Spray System" and "UV Absorber Coating"
- New fixing application with "Dry Tech System" and Mechanical Fixing that help prevent water leakage and mortar stain from the traditional wet mortar fixing process

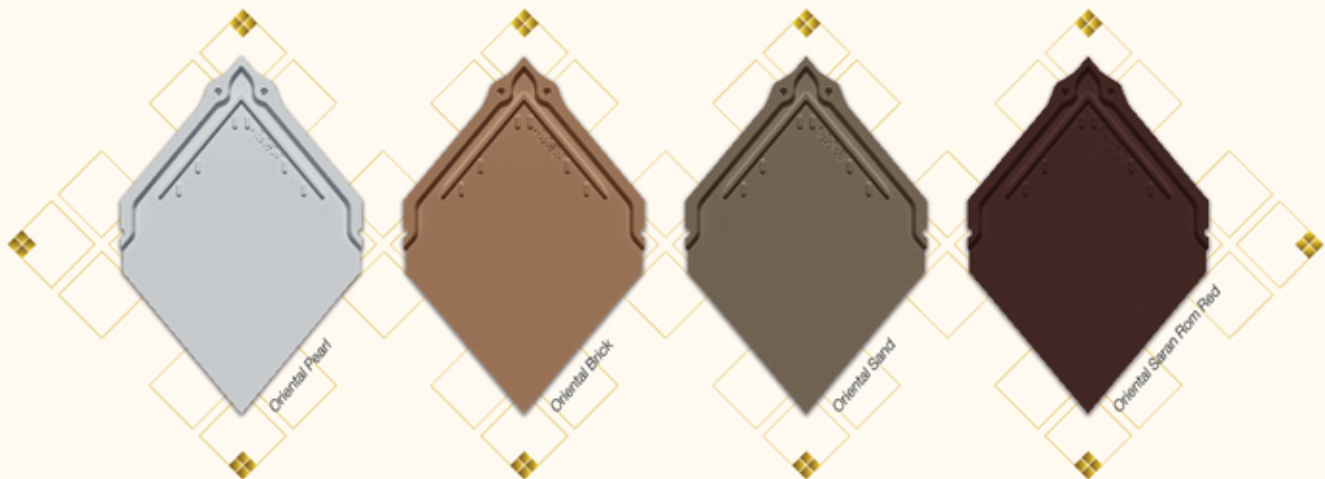


**NEW!**

Superior leakage protection from the unique design innovation that controls water and wind flow allowing installation without sub-roof

Ridge that controls water flow

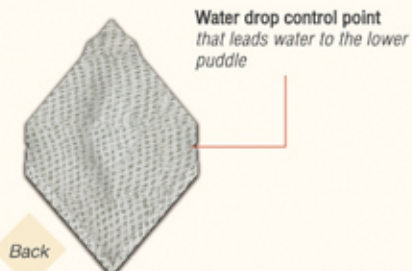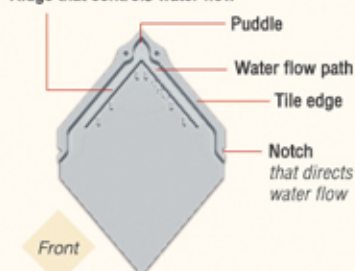

Installation simulation

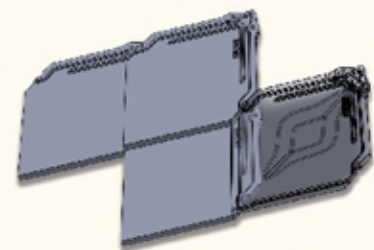

When water flows on **tile edges** to the **notch**, it will be directed to the **water drop control point** then to the lower **puddle**. The **path** that is well designed will facilitate the water flow from the puddle to the lower part of roof panel.



MAIN TILE



TOP TILE



EAVES TILE



ANGLE RIDGE



ANGLE RIDGE END



ANGLE HIP



ANGLE HIP END



VERGE



VERGE END

# Oriental

PROUD TO BE

"NeuStile Oriental"

## Approximate Product Specification

|                        |             |
|------------------------|-------------|
| Product Dimension      | 30 x 45 cm. |
| Minimum Roof Pitch     | 25°         |
| Maximum Roof Pitch     | 45°         |
| Recommended Roof Pitch | 35 - 40°    |
| Batten Space           | 17.5-18 cm. |

## Approximate Usage

|                               |           |
|-------------------------------|-----------|
| Number of Main Tile per sq.m. | 18.5 pcs. |
| Number of Top Tile per m.     | 3.3 pcs.  |
| Number of Eaves Tile per m.   | 3.3 pcs.  |

## Approximate Weight

|                     |          |
|---------------------|----------|
| Main Tile per pc.   | 2.8 kg.  |
| Top Tile per pc.    | 1.7 kg.  |
| Eaves Tile per pc.  | 1.85 kg. |
| Dead Load per sq.m. | 52 kg.   |

## Minimum Fixing

Fix each tile with 2 pcs of 1.5 inch screws to SCG Batten every other row. Refer to standard installation manual for more information.

\*Refer SCG Concrete Roof Tiles, NeuStile Oriental Series installation manual for standard installation.

\*Slight differences on color shade among tiles may occur due to normal characteristic of concrete roof tiles. It is recommended that tiles and fittings must be purchased at once per usage.

\*Tile colors shown on this catalogue may vary from real tiles due to printing quality.

\*The company reserves rights to change or adjust product information, specification, etc. without prior notice.

## Codes of Conduct for Safety

\* Tiles and fittings are designed for pitched roof which has pitch degree in accordance with the company's installation manual. \* Please strictly follow the installation manual. In case of a roof is not pitched roof, please consult the company. \* Please strictly follow the company's advice on tile standard loading, transportation and storage in order to prevent possible accident. \* Tile surface may be wet or slipping. Please avoid standing, walking or working on the roof especially when raining. \* Safety equipment such as safety belt or life line is necessary for working on roof. \* Do not use foam-type insulation which will reduce tile performance.

## Cautions

\* Storage, transportation and installation must be handled with care. \* Storage, transportation and installation are in accordance with the company's standard and manuals. \* For more information, contact SCG Contact Center 02-586-2222.

MHB-S-R15-C002-6109

\* Product colors shown on this catalogue may be different from real tiles due to printing process. Company reserves rights to change any information without prior notice.

\* All Content, design, and layout are Copyright © 2018, SCG Cement-Building Materials All Rights Reserved. Reproduction in whole or part in any form or medium without specific written permission is prohibited



Available for purchase at SCG Authorized Dealers and leading construction material shops.  
SCG Contact Center 02-586-2222  
Email : [contact@scg.com](mailto:contact@scg.com), [www.scgbuildingmaterials.com](http://www.scgbuildingmaterials.com)